

## ASL8112R ASL8112K ASL8112S

High-end Bluetooth smart lock



## **Technical Specification**

Card		
Card Type	Mifare 1	
Card Features	Contactless, high security, all-in-one possible	
Sensor Distance	< 20mm	
Sensor Time	< 0.5s	
Storage Capacity	50	
Password		
Keyboard Type	All-touch keyboard	
Password Length	6-12 bits	
Storage Capacity	50	
Fingerprint		
Sensor	Capacitive	
False Rejection Rate	≤0.1%	
False Accept Rate	≤0.0001%	
Fingerprint Capacity	50	
Battery		
Working Voltage	6V, "AA"battery (4pcs)	
Battery Life	About 1 year (10 units/D)	
Low Battery Warning	< DC4.5V	
Emergency Power Supply	9V battery	

## Features

• 5-way opening: Easy4key App, Fingerprint, Mifare Card, password and mechanical key

 $\cdot$  Voice prompt: All settings can be finished by following voice prompt

 $\cdot$  Privacy password: xxx+password+xxx, preventing password to be seen by others

· Passage Mode and Non-disturbance Mode optional


 $\cdot \text{Auto}$  lock when come across a consecutive invalid passwords or cards


- · Low Voltage alarm(≤4.5V), doorbell
- $\cdot$  Huge storage: 50 Fingerprints, 50 cards, 50 passwords
- $\cdot$  Emergency power supply outside
- $\cdot$  Three colors optional
- $\cdot$  Zinc alloy material

## Structure

Door Thickness	42-80mm (customizable)	
Backset	60mm	
Central Distance	68mm	
Product Standard	GA374-2001(e-lock)	
Material	Zinc alloy	
General		
Working Temperature	-30°C~+70°C	
Relative Humidity	10%~93%	
Salt spray test	≥200h	
Lock case test	≥100000 times	
Package size	410*225*155(mm)	
Gross weight	6Kg	
Restore Default	Support	
Reset	Support	
Ring	Support	
Built-in Buzzer	Support	
Built-in Loudspeaker	Support	

Black Bronze	Antique Copper	Satin Silver
DHI-ASL8112K-B	DHI-ASL8112R-B	DHI-ASL8112S-B

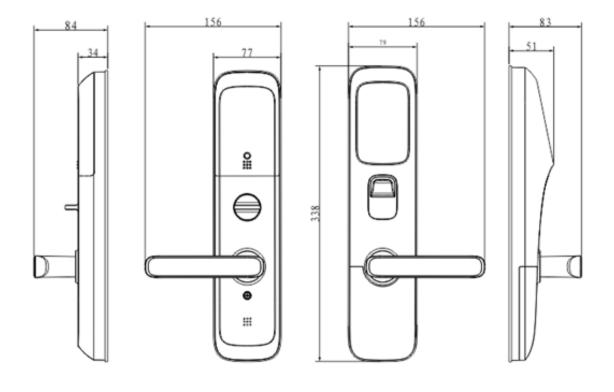

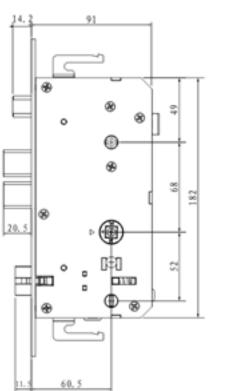



24



Rev 001.001 © 2016 Dahua . All rights reserved. Design and specifications are subject to change without notice