

DHI-ASR2102A

Access Reader



Series Overview

As a key part of the access control system, the DHI-ASR2102A access control card reader supports card and fingerprint unlock, and sends the information to the access controller for verification. With a thin and elegant design, it is applicable to industrial zones, office buildings, schools, factories, stadiums, CBD, residential area, government properties, etc.

Technical Specification

Basic

| | |
|--------------|-------------------------|
| Product Type | Fingerprint Card Reader |
| Buzzer | Yes |
| Casing | PC/acrylic panel |

Function

| | |
|------------------------|--|
| Unlock Mode | Card swiping/fingerprint Multiple unlocking modes |
| Card Type | IC card |
| Modulation Type | AM |
| Frequency Range | 13.56 MHz |
| Max Transmission Power | 42 dBuA/m @10 m |

Performance

| | |
|-------------------------------|-------------------------------|
| Response Time | 0.1 s |
| Card Reading Distance | 0 cm–5 cm (0"–1.97") |
| Fingerprint Sensor Type | Capacitive fingerprint sensor |
| Fingerprint Verification Mode | 1:N |


- PC material, acrylic panel and IP65, suitable for indoor and outdoor use
- Support contactless recognition of IC card (Mifare card)
- Support card/fingerprint unlock
- Support RS-485 communication protocol
- Support buzzer and indicator prompt
- Support anti-tampering alarm
- The built-in watchdog can detect and control the abnormal operation status of the equipment and perform recovery processing to ensure the long-term operation of the equipment
- All connection ports have overcurrent and overvoltage protection



| | |
|------------------------------|---|
| Fingerprint Recognition Time | 1.5 s |
| Capacity | |
| Fingerprint Capacity | 3000 |
| Port | |
| RS-485 | 1 channel |
| Alarm | |
| Tamper Alarm | Yes |
| General | |
| Power Supply | 12V 0.5A DC |
| Protection | IP65 (silicon sealant is needed, see the manual) |
| Power Consumption | Standby ≤ 1.0W, working ≤ 1.7W |
| Product Dimensions | 70 mm × 70 mm × 26 mm (2.76" × 2.76" × 1.02") (L × W × H) |
| Packaging Dimensions | 110 mm × 97 mm × 90 mm (4.33" × 3.82" × 3.54") (L × W × H, 1 in inner carton) 578 mm × 313 mm × 204 mm (22.76" × 12.32" × 8.03") (L × W × H, carton) |
| Operating Temperature | –20°C to +65°C (–4°F to +149°F) |
| Operating Humidity | 5%RH–95% (non-condensing) |
| Operating Environment | Indoor; outdoor |
| Gross Weight | 0.17 kg (0.37 lb) |
| Installation | Surface mount |
| Certifications | CE; FCC |

| Ordering Information | | |
|----------------------|--------------|--|
| Type | Model | Description |
| Access Reader | DHI-ASR2102A | DHI-ASR2102A Outdoor Waterproof IC Card and Fingerprint Reader |

Dimensions (mm[inch])

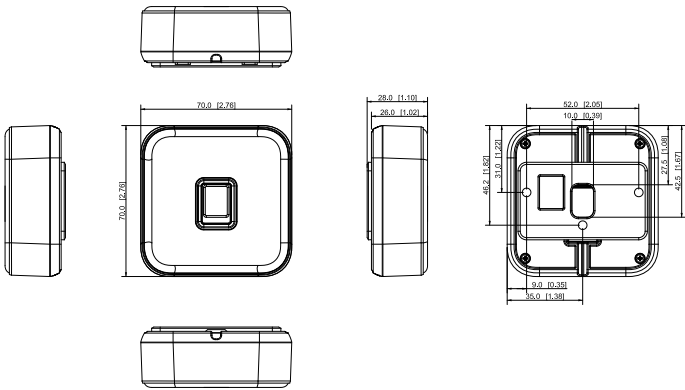

Application

