

Battery Construction

Component	Positive Plate	Negative Plate	Container	Cover	Safety Valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS UL94HB/V0	ABS UL94HB/V0	Rubber	Copper	Fiberglass	Sulfuric acid

Constant Current Discharge Rating Amperes @25°C (77°F)

Time	10min	15min	30min	1hr	3hr	5hr	10hr	20hr
Final Discharge Voltage A/cell	19.463	15.863	9.225	5.400	2.340	1.530	0.837	0.450


Characteristics

Rated Capacity 25°C (77°F)	C20 1.75V/C	9.00 AH	
	C10 1.75V/C	8.37 AH	
	C5 1.70V/C	7.65 AH	
	C1 1.60V/C	5.40 AH	
Internal Resistance	Full charged battery 25°C (77°F)	23.0 mΩ	
Capacity affected by temperature (20 hour rate)	40°C (104°F)	107%	
	25°C (77°F)	100%	
	0°C (32°F)	76%	
	-10°C (14°F)	66%	
Self Discharge	Batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.		
Standard Terminal	F2		
Max. Discharge Current 25°C (77°F)	90 A(5s)		
Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.15C	0.15C < (A) < 0.5C	(A) ≥ 0.5C
Charging (Constant Voltage)	Cycle	Initial Charging Current 2.3 A Or Small	
		14.5V~14.9V/ 25°C (77°F)	
	Float	13.6V~13.8V/ 25°C (77°F)	


Specifications

Nominal Voltage	12 V		
Nominal Capacity (20hr)	9 AH		
Dimension	Length	151 mm	5.94 in
	Width	65 mm	2.56 in
	Height	94 mm	3.70 in
	Total Height (with terminals)	100 mm	3.94 in
Weight	Approx.	2.5 kg	5.50 lbs

Physical Dimensions: mm

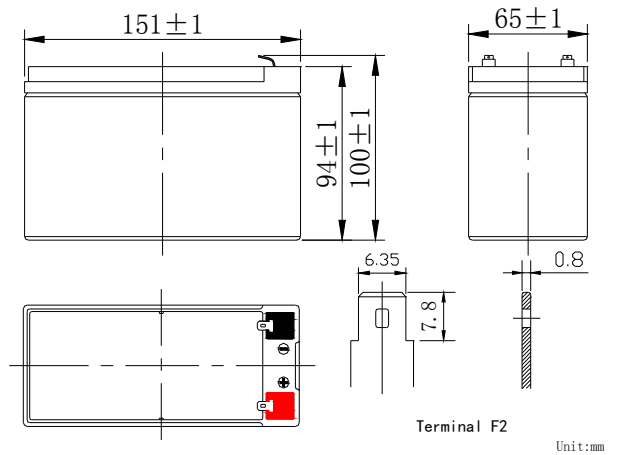

Charge characteristic curve for standby use

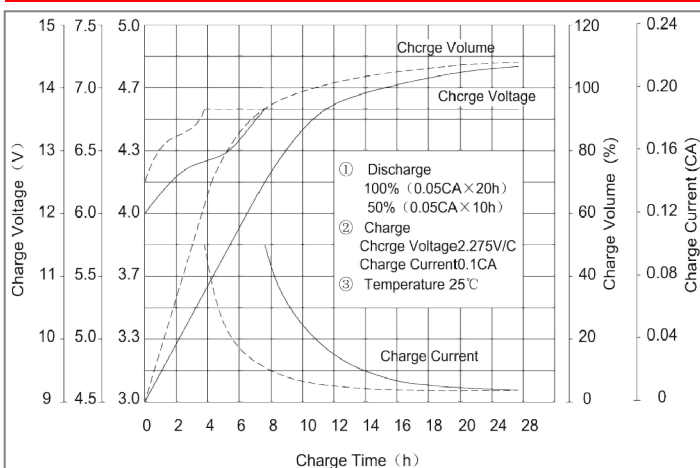

Discharge characteristics 25°C (77°F)

